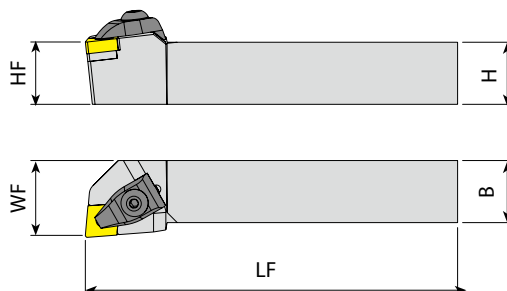


Turning - Holder - External

Double Clamp type for CN** Insert

TCLNR Shown



☐ : Refer to p. 28

Unit:mm

Series	Designation	EDP 2700.. R	L	H (= HF)	B	WF	LF	Insert
 TCLNR/L Approach angle 95°	TCLNR/L 2020K 12	0482	0483	20	20	25	125	CN1204
	TCLNR/L 2525M 12	0484	0485	25	25	32	150	
	TCLNR/L 3232P 12	0486	0487	32	32	40	170	
	TCLNR/L 4040S 12	0488	0489	40	40	50	250	
	TCLNR/L 5050S 12	0490	0491	50	50	63	250	
	TCLNR/L 2525M 16	0492	0493	25	25	32	150	CN1606
	TCLNR/L 3232P 16	0494	-	32	32	40	170	
 TCBNR/L Approach angle 75°	TCBNR/L 2525M 16	0452	0453	25	25	22	150	CN1606
 TCKNR/L Approach angle 75°	TCKNR/L 2020K 12	0454	0455	20	20	25	125	CN1204
	TCKNR/L 2525M 12	0456	0457	25	25	32	150	
	TCKNR/L 3232P 12	0458	0459	32	32	40	170	
	TCKNR/L 2525M 16	0460	0461	25	25	32	150	CN1606
	TCKNR/L 3232P 16	0462	0463	32	32	40	170	

TURNING

PARTING & GROOVING

MILLING

DRILLING

TECHNICAL INFORMATION

Series	Designation	Information	Clamp	Clamp Screw	Upper Ring	Lower Ring	Shim	Shim Screw	Allen Key
TC..	..12	Description	YATK-02	YAKV-30-M6x22	YABPL-01	YAS-01	YAACN-3-0001	YAAV-02-M5x12	YAAL-03-3
		EDP	18000075	18000091	18000058	18000052	18000137	18000156	18000061
	..16	Description	YATK-04	YAKV-19-M7x25	YABPL-02	YAS-02	YAACN-3-0002	YAAV-05-M6x15	YAAL-05-4
		EDP	18000077	18000088	18000059	28000042	18000138	18000078	18000062

Turning - Name Code System

External Turning Holder Code

1	2	3	4	5	6	7	8	9	10
P	C	L	N	R	25	25	M	12	(C)
Clamping System	Insert Shape (1st Letter of Insert)	Tool Style	Insert Clearance (2nd Letter of Insert)	Tool Hand	Shank Height (H)	Shank Width (B)	Length (LF)	Insert Size	(Optional Clamp)

1 - Clamping System

Symbol	System
C	Top Clamp (No Clamping Hole Insert)
M	Multi lock (Straight Clamping Hole Insert)
P	Lever Lock (Straight Clamping Hole Insert)
S	Screw Clamp (Screw Clamping Hole Insert)
T (D, A)	Double Clamp (Straight Clamping Hole Insert)

2, 4 - Insert Compatibility *



* Related to Insert Designation to check compatibility

* Refer to '1-shape' of page 18

3 - Tool Style




Approach Angle (KAPR)	Side Direction		End Direction
	Straight Shank	Offset Shank	
45°	D 	S 	
60°		T 	
62.5°	N 		
72.5°	V 		
75°	B 		K
90°/91°	A 	G 	F
93°		J 	U
95°		L (Both Direction) 	
107.5°		H 	

Turning - Name Code System

External Turning Holder Code

1	2	3	4	5	6	7	8	9
S	D	J	C	R	20	20	K	11
Clamping System	Insert Shape (1st Letter of Insert)	Tool Style	Insert Clearance (2nd Letter of Insert)	Tool Hand	Shank Height (H)	Shank Width (B)	Length (LF)	Insert Size

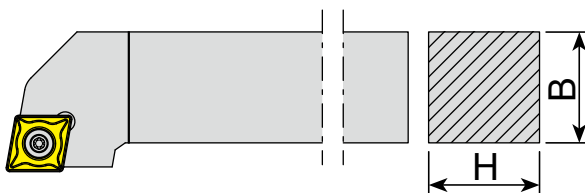
5 - Hand Direction

Symbol	Hand Direction
R	Right Hand 
L	Left Hand 
N	Neutral 

8 - Length (LF)

Symbol	Length (mm)	Symbol	Length (mm)
E	70	Q	180
F	80	R	200
H	100	S	250
K	125	T	300
M	150	U	350
P	170	V	400

6, 7 - Shank Height (H) Shank Width (B)



9 - Insert Size *

Examples	is Compatible with...
PCLNR 2525M 12	CNMG 1204**
SCLCR 2020K 09	CCMT 09T3**
TWLNr 2525M 08	WNMG 0804**

* Related to Insert Designation to check compatibility

(10 - Optional Clamp)

Symbol	Optional Clamp
C	Included